

The iBOX Kit from GE Energy provides powerful, cost-effective substation and feeder control solutions combining multiple communication ports and protocols, IEC® 61131-3 automation, and local I/O, in a small footprint that is ideal for retrofit and upgrade projects. In addition to the flexibility of the standard iBOX*, this kit provides the added benefits of AC or DC analog inputs, Ethernet, and support for a wide range of power supply input voltages. The iBOX Kit is built on a 19" wall or rack mountable panel.

Digital Inputs

- 8 optically isolated status inputs. 24 VDC, 48 VDC, or 125 VDC, with 10% overload, wetting options available
- LED indications
- 4-5 mA typical current burden per input (up to 48 VDC)
- Maximum 0.5 W heat dissipation per input from current burden of inputs at 125 VDC

Control Outputs

- 4 Trip/Close pairs or 2 Trip/Close pairs and 2 Form A contacts
- Separate Master Trip and Master Close relays
- Security features: protection against erroneous operation due to single point of failure, select-before-operate (SBO) functionality
- 35 W breaking @ 125 VDC
- 180 W breaking @ 30 VDC
- 6A current carrying capability

DC Analog Inputs

- 8 DC analog inputs
- DC voltage options: +/- 1 VDC, +/-5 VDC, +/-10 VDC
- DC current options: +/-1 mA, +/-20 mA, 4-20 mA
- Accuracy: 0.2% of full scale @ 25C
- 14-bit resolution plus sign

AC Analog Inputs

- Single circuit monitoring (wye connected)
- V_{RMS} , I_{RMS} , Phase Angle, Frequency, Power Factor
- Real Power (W), Reactive Power (VAR), Apparent Power (VA)
- Watt-Hour, VAR-Hour
- Nominal PT input range: 0 to 150 VLN or 250 VLL
- Nominal CT input: 5A
- Frequency: 50/60 Hz
- Measurement range: 0 to 125% of nominal
- Accuracy: 0.3%
- Continuous overload withstand: 200% of nominal
- Short duration overload withstand: 100 A for 3 sec
- Surge withstand as per IEEE®C37.90.1, ANSIC62.41
- True RMS sampling at 64 samples per cycle
- Isolation: 2500 VAC/60 Hz
- Burden:
 - Voltage & Current: 0.1 VA max
 - Power Supply: 6 VA max

Communications

- Protocols: Modbus®, DNP3.0 and IEC-870-101 included (Many others available as options)
- Ethernet
 - 10/100 Base T
 - RJ-45 connector
 - Wireless IP Radio ready (via PPP serial port)
- RS-232/485
 - 300 to 38.4k Baud
 - LED Indicators: TX, RX, RTS, CTS, DCD
 - Connection: DB-9F, RS-232/RS-485 signals
 - Solid state, radio-keying relay driven by COM1 RTS signal; output capable of sinking 3A @ 36 VDC
- WESMAINT configuration / maintenance port

Power Supply

- Input options: 20-60 VDC, 88-264 VAC/88-360 VDC
- Output: 24 VDC
- 20 W max input supply draw



Physical

- Dimensions:
 - DC Kit: 8.75" x 19" footprint
 - 2" high without Ethernet
 - 4.9" high with Ethernet
 - AC Kit: 8.75" x 19" footprint
 - 4.7" high without Ethernet
 - 4.9" high with Ethernet
- Mounting: 4 mounting holes, 2 slotted for easy installation
- Terminations:
 - Digital Inputs: #14 quick disconnect compression terminal blocks
 - Controls: #14 quick disconnect compression terminal blocks
 - DC analogs: #14 quick disconnect compression terminal blocks
 - AC analog: barrier strip
 - Input power: barrier strip

Environmental

- Temperature:
 - iBOX: -40° to +80°C operating range
 - DC Analog Module: -10° to +70°C operating range
 - AC Analog Module: -20° to +70°C operating range
 - Ethernet Module: 0° to +60°C operating range
 - Power Supply: -40° to +80°C operating range

Firmware


- Flexible, application dependent
- Working default configurations provided for all iBOX Kit options

Maintenance Software

- WESMAINT
- System requirements: IBM® PC or compatible computer, VT100 emulator

Configuration Software

- ConfigPro*
- LogicLinX* Editor (if using LogicLinX)

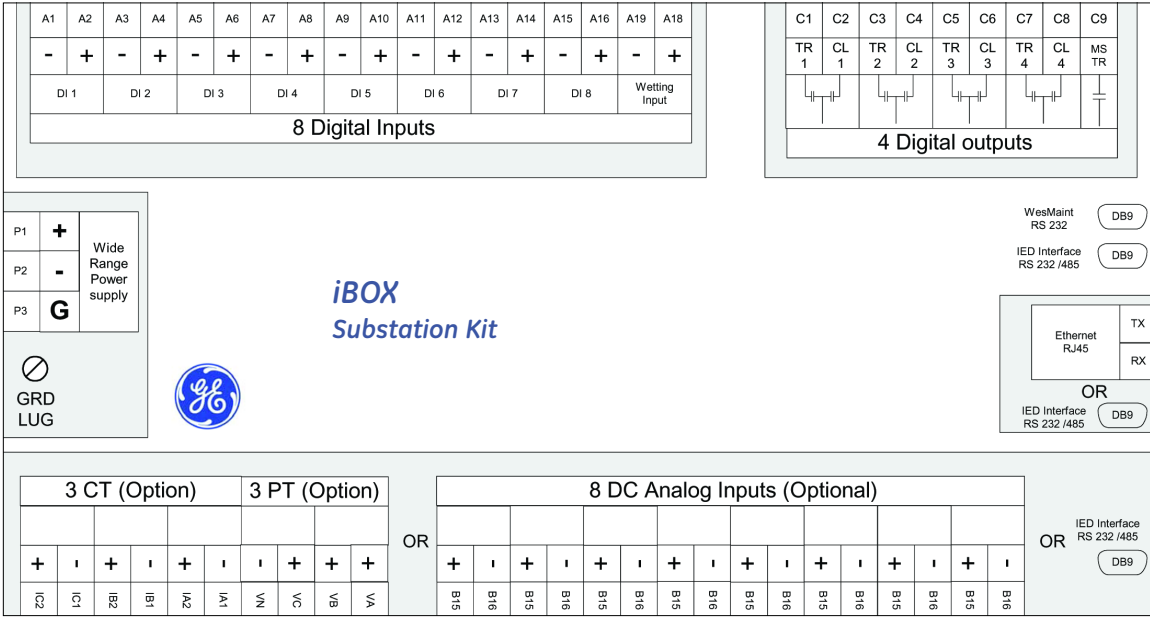

For more information about this product, contact your GE Energy sales representative, visit gepower.com or email us at automation.solutions@ge.com.

IBM is a registered trademark of International Business Machines.
 *Trademarks or registered trademarks of General Electric Company.
 IEC® is claimed as a registered trademark by Commission Electrotechnique Internationale.
 IEEE® is claimed as a registered trademark by the Institute of Electrical Electronics Engineers, Inc.
 Modbus® is claimed as a registered trademark by Gould, Inc.
 ©2005, General Electric Company. All rights reserved. The contents of this document are the property of General Electric Company. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with General Electric Company. General Electric Company has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of General Electric Company. The GE logo is a registered trademark of General Electric Company.

