

Reuter Stokes Helium-3 Proportional Counter RS-P4-0406-212

fact sheet

Time-of-Flight Spectroscopy

Advantages of this Helium-3 filled proportional counter include:

- Small Size
- High Neutron Sensitivity
- Excellent Spectral Resolution
- Low Operating Voltage
- Short Jitter Time

Precision Performance

Helium-3 purification techniques and manufacturing process control were developed to ensure precise matching of operating characteristics among large batches of counters. This permits parallel operation of large numbers of detectors without need for separate power supplies or gain matching.


Customizable Solutions

This detector has a 1.27 cm diameter and a sensitive length of 15.24 cm. Detectors are available in lengths from 7.00 cm to 60.00 cm.


Sample Specifications

This proportional counter is a sample of one of over 10,000 neutron counter designs we have manufactured. Please contact us if your application requires modification of the specifications given here.

Typical Counting Arrangement

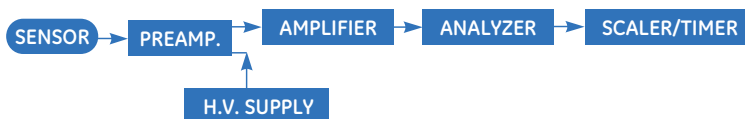

Type MHV Connector mates with any series MHV plug such as UG-932/U

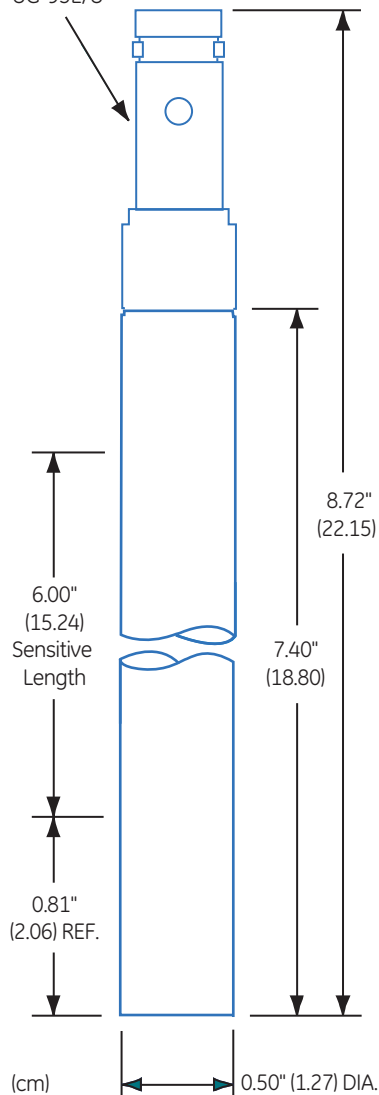

Specifications

Mechanical

- Maximum diameter: 1.32 cm
- Maximum overall length: 22.45 cm
- Connectors (2) type: MHV
- Net weight: 0.1 kg

Material

- Outer shell: 304 Stainless Steel
- Insulation: Alumina ceramic
- Neutron sensitive material: ^3He
- Fill pressure: 10 Atmospheres ^3He (see note)

Capacitance

- 7 pf

Resistance @ 25°C

- 10^{12} ohms (minimum)



Maximum Ratings

- Voltage: 2000V
- Temperature: 150°C
- Operating gamma flux: 1 R/hr

Operating Characteristics

- Thermal neutron sensitivity (unperturbed): 8 cps/nv
- Thermal neutron flux range: to 10^4 nv
- Voltage range: See plateau curve
- Resolution (FWHM): See spectrum
- Output pulse characteristics (average)
 - Charge output: 1×10^{-13} coulombs @ 1100 V
 - Jitter time: 1 μ sec

Note: Other sensitive lengths available from 7 to 60 cm, other pressures available to 15 atmospheres.

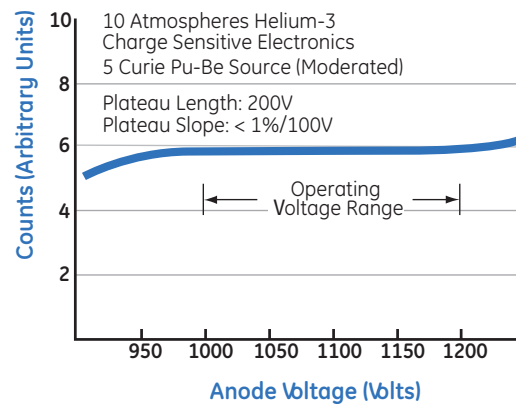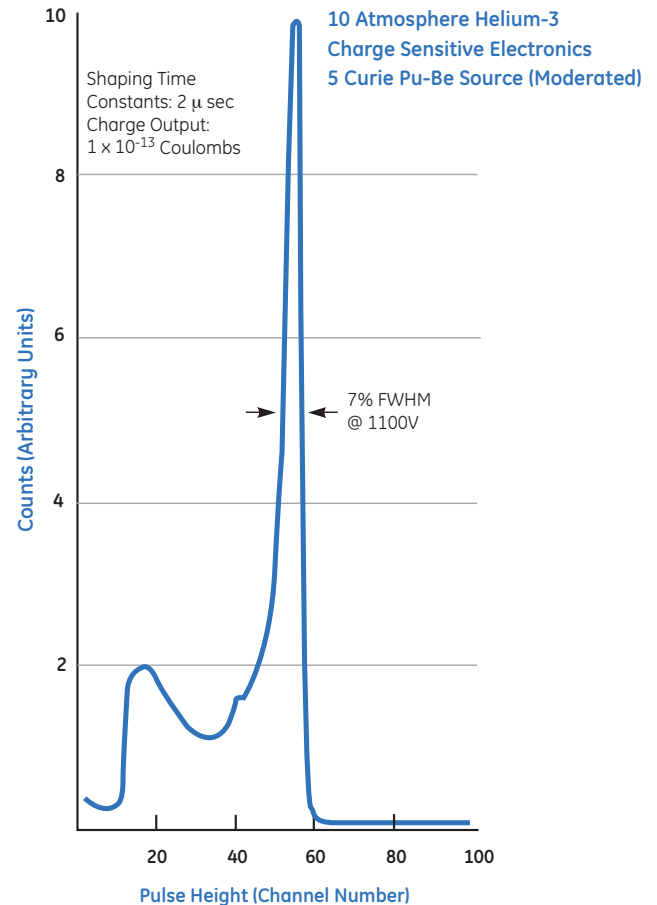

8499 Darrow Road
Twinsburg, OH 44087
Ph: 1 (330) 425-3755
Ph: 1 (512) 251-4131
E-mail: rsweb@ge.com
gepower.com/reuterstokes

©2005, General Electric Company. All rights reserved. The contents of this document are the property of General Electric Company. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with General Electric Company. General Electric Company has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of General Electric Company. The GE logo is a registered trademark of General Electric Company.