

Reuter Stokes Helium-3 Filled Proportional Counter
RS-P4-1614-204

fact sheet

Thermal Neutron Counting, Spectroscopy and Nuclear Materials Assay

A Smart Design

This Helium-3 filled proportional counter has a 5.08 cm diameter design for safeguards applications. It combines the performance characteristics required by both safeguards and spectroscopy applications: high sensitivity, moderate operating voltage and excellent spectral resolution. Other sensitive lengths are available on request.

For spectroscopy applications the detector design uses the diameter, cathode and anode relationship, internal field shaping and gas additives to minimize wall effects and optimize the spectral resolution over a wide energy range.

Precision Performance

Helium-3 purification techniques and manufacturing process control were developed to ensure precise matching of operating characteristics among large batches of counters. This permits parallel operation of large numbers of detectors without need for separate power supplies or gain matching.

Customizable Solutions

Gas mixtures can be tailored for a customer’s applications and for optimization of combined parameters including operating voltage, pulse risetime, pulse jitter time, gas gain, spectral resolution, neutron sensitivity and gamma ray sensitivity.



Product Configurations

The detector has a sensitive length of 34.45 cm and an outer diameter of 5.08 cm. Sensitivity is approximately 100 cps/nv for thermal neutrons when filled with standard pressure of three atmospheres of Helium-3 gas. Plateau slope <2% per 100 volts over a minimum of 200 volts range.



Sample Specifications

This proportional counter is a sample of one of over 10,000 neutron counter designs we have manufactured. Please contact us if your application requires modification of the specifications given here.

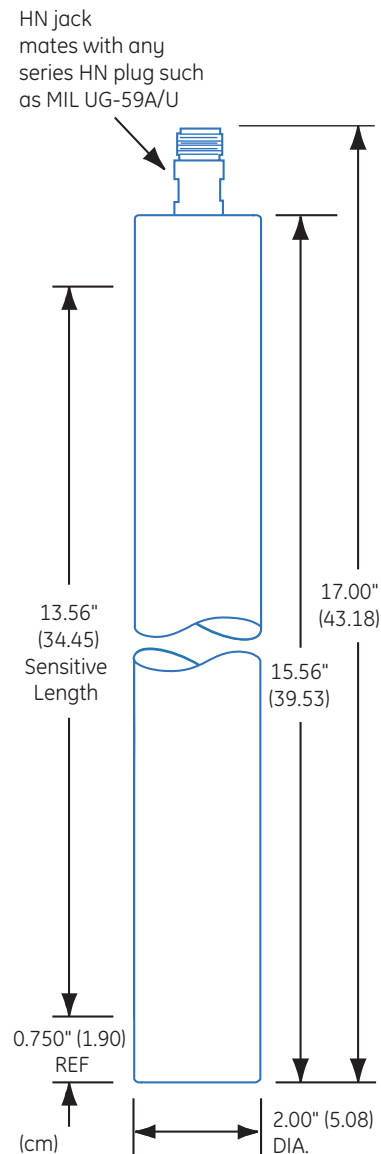

Specifications

Mechanical

- Maximum diameter: 5.16 cm
- Maximum overall length: 43.5 cm
- Connector type: HN female
- Net weight (maximum): 0.45 kg

Material

- Outer shell: 304 Stainless Steel
- Connector: Brass, silver plated
- Insulation:
 - Detector: Alumina ceramic
 - Connector: Teflon
- Neutron sensitive material: Helium-3
- Fill pressure: 3 atmospheres

Capacitance

- 8 pf

Resistance @ 25°C

- 10^{12} ohms (minimum)


Maximum Ratings

- Voltage: 3500 V
- Temperature: 100°C


Typical Operating Characteristics

- Thermal neutron sensitivity (unperturbed): 100 cps/nv
- Thermal neutron flux range: to 10^3 nv
- Voltage range: See plateau curve
- Resolution (FWHM): See spectrum
- Output pulse characteristics (average)
 - Charge output: 1×10^{-13} coulombs @ 1100 V


Typical Spectroscopy Arrangement




Typical Counting Arrangement



Typical Differential Pulse Height Spectrum

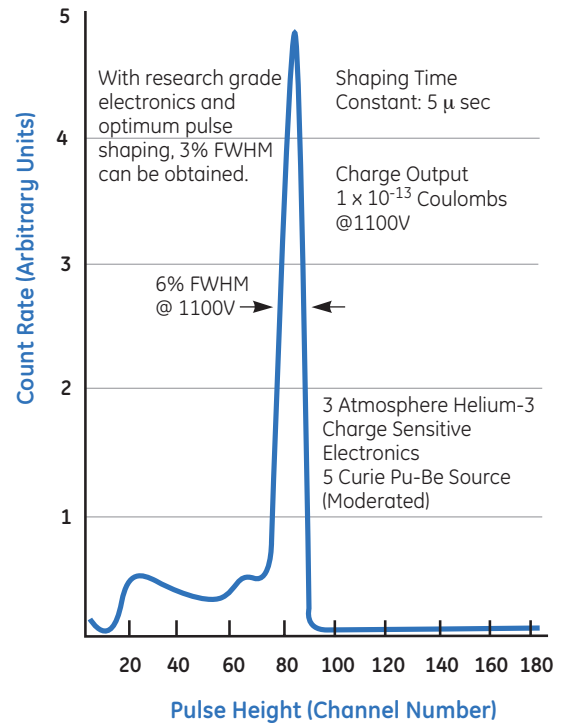

Typical Plateau Curve

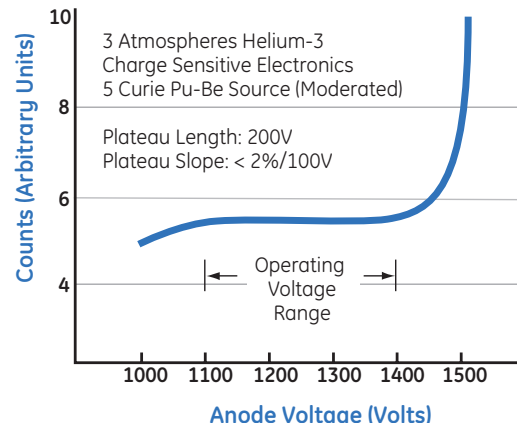

8499 Darrow Road
 Twinsburg, OH 44087
 Ph: 1 (330) 425-3755
 Ph: 1 (512) 251-4131
 E-mail: rsweb@ge.com
gepower.com/reuterstokes

©2005, General Electric Company. All rights reserved. The contents of this document are the property of General Electric Company. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with General Electric Company. General Electric Company has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of General Electric Company. The GE logo is a registered trademark of General Electric Company.

